


4171-GB

WIRELESS PENDANT

The 4171-GB is a wireless pendant transmitter for use with the FM Electronics Alarm Systems, providing a Panic facility.

The green LED indicates that the unit is transmitting. If the LED does not illuminate when the button is pressed replace the batteries.

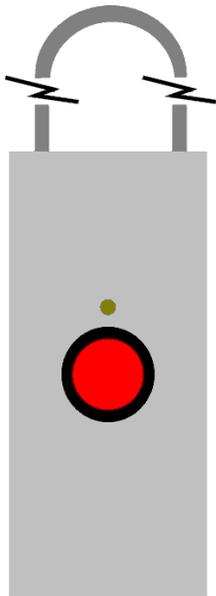

OPERATION

Before initial operation a battery must be fitted, see over

Press and hold the push button for at least 1 second. The green LED will come on and the unit will transmit Panic Alarm to the FM Control Panel.

The unit must be added to a Alarm Panel before unit is operational (see over).

If the neck loop is broken in operation the unit will transmit Panic Alarm and the green LED will come on for the duration of the transmission.


If a neck loop is broken or damaged, the battery should be removed and the unit returned to the factory for repair.

It is advised that the battery is changed before each installation and tested regularly.

RECOMMENDED BATTERIES One 20mm 3v Lithium cells CR2450 (Available from FM Electronics order number: BAT12)

TO REPLACE THE BATTERIES

1. Unscrew and remove the two screws in the back of the unit.
2. Push the battery out of the holder with a non-metallic instrument
3. Fit the new battery ensuring that the +ve side is uppermost.
4. Check operation of the LED
5. Replace the back plastic and replace screws.

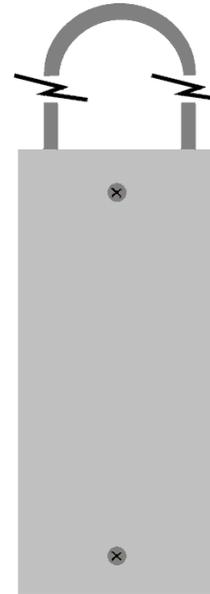

ADDING A WIRELESS PENDANT TO A FM CONTROL PANEL

1. Enter the control panels engineer mode by keying in the engineer code 4679. (The alarm LED will illuminate to indicate that you are in engineer mode.
2. Key in 091
3. Press and hold the push button for 1 second. The panel will bleep twice and zone 1 LED will illuminate to indicate that one pendant is programmed onto the system. The number of zone LED's indicates how many pendants are programmed onto the system.

To remove all pendants from the system, press the Off and Part set keys together. (All zone LED's will go out)
4. Press the Full Set key to accept
5. Key in 48 to exit engineer mode.



South Walk, Vantage Point Business Village,
Mitcheldean, Gloucestershire, GL17 0DD Tel. 01594
827070 email. sales@fmelectronics.co.uk
www.fmelectronics.co.uk

FM Electronics is the Manufacturing division of **FM Security Ltd**